

Highlights

- Exceptional Experience
- Intuitive and Easy To Use
- 2.4 MP Full HD 1080P
- Day Night 25 Mtr IR
- Privacy masking
- All in one solution

MOUNTXROSS MWH225P



The outdoor MountXross cameras are easy-to-install and are suitable for surveillance applications in areas such as homes , schools, colleges , restaurants , hotels , markets etc.



High image quality is maintained even in low light conditions, thanks to the cameras' day/night functionality. Support for wide dynamic range enables objects in both dark and light areas of a scene to be visible .The outdoor MountXross MWH225P has IP66-protection against dust, rain and snow and can operate in temperatures from -10 °C to 50 °C .



Technical specifications - MountXross MWH225P

Camera

Image Sensor	1/2.9" sony low illumination 2.4 MP CMOS sensor
Main processor	2.4 MP
Resolution	1080p
Effective pixels	1920(H)*1080(V)
TV system	1080/720p @25fps
Usable Illumination	
Electronic shutter time	Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec
S/N ratio	≥52dB
Scanning system	Progressive
Video output	Network

Lens

Focus Length	Board Lens 3.6mm/F2.0
Focus Control	Fixed
Lens Type	Fixed
Pixels	2M Pixels

Camera Features

Day/Night	Color/ B&W (IR-CUT)
Compression	H.264/JPEG/AVI
Image Config	Saturation/Brightness/Contrast / Sharpness, Mirror, 3D NR , White Balance, BLC,
Back Light Compensation	YES
WDR	YES
Low Bandwidth Consumption	NO
Denoise	YES
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/NAS/CMS/Web
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian

Night Vision


Infrared LED	∅ 14μ x 18PCS
Infrared Distance	20M
IR Status	Under 10 Lux By CDS
IR Power On	CDS Auto Control

Network

Ethernet Protocol	RJ-45 (10/100Base-T) IPv4, HTTP, TCPIP, FTP, NTP, RTSP, UDP, SMTP, DNS, DDNS
ONVIF	Support ONVIF 2.4
P2P	YES, Support QR Code
POE	Optional, Support IEEE 802.3af
Video Delay	0.3S (Within the Lan)
Main Stream	1920*1080@30fps
Sub Stream	720*480@30fps
IE Brower	IE6-11, Google Chrome (IE Tab), Firefox(IE Tab)
Smart Phone	iPhone, iPad, Android, Android Pad

General

Housing	Metal
Anti-cut Bracket	NO
IR Cut Filter	YES
Operation Temperature	-10℃ ~ +50℃ RH95% Max
Storage Temperature	-20℃ ~ +60℃ RH95% Max
Power Source	DC12V±10%, 500mA
Dimension	∅ 94 x 69(H) mm
Weight	480g

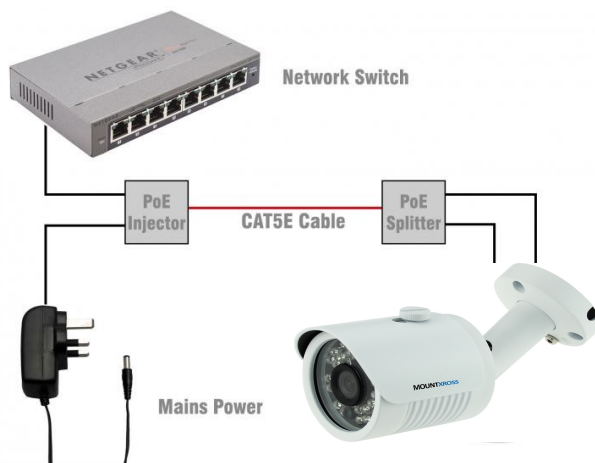

Visit us at : www.mountxross.com
For Enquiry : info@mountxross.com
For Sales : sales@mountxross.com
Contact us : +8613510224602

Distributor